Alderwick Marquees

FLOORING INSTALLATION PLAN

Orchard Lawn reception | 12x18m


HR-1042 | Revision 1 | All dimensions per marquee

Orchard Lawn · example venue

BOARD TOTALS FOR THIS MARQUEE

124 full boards (8 ft) **18 half boards (4 ft)**

Gaps measured from the marquee footprint to the laid floor edge.

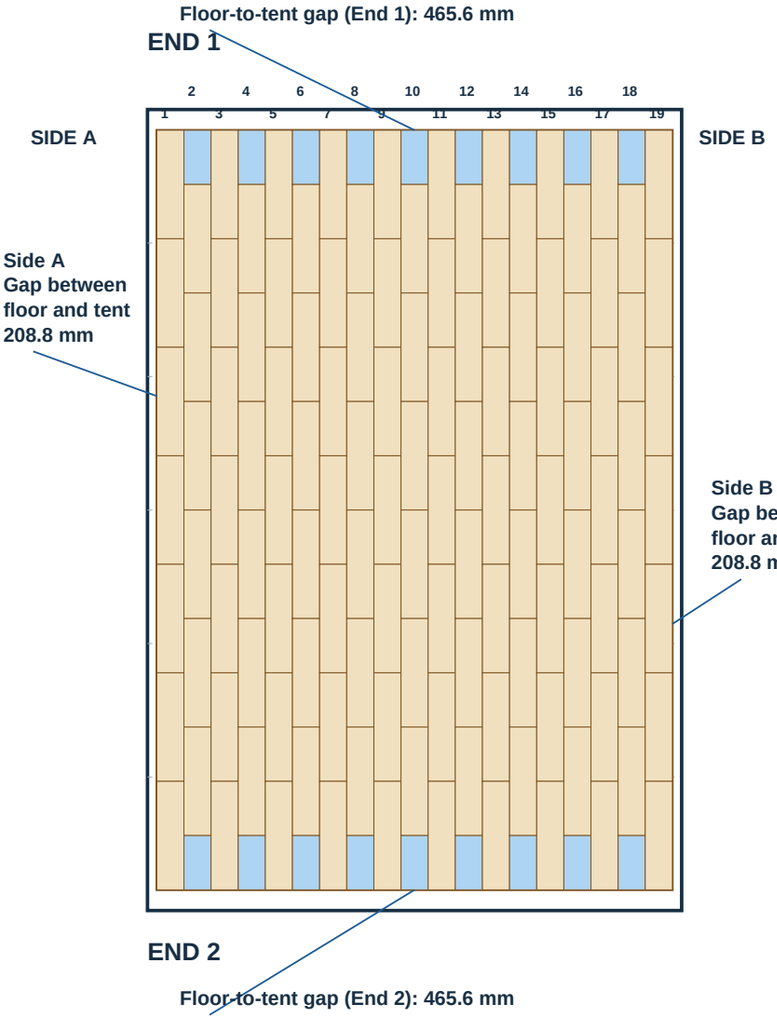

F1 - Interlocking floor

Selected area: 12 x 18 m

Laid coverage: 11.5824 x 17.0688 m

Gaps between floor and tent:

Side A: 208.8 mm | Side B: 208.8 mm

End 1: 465.6 mm

End 2: 465.6 mm

Selected area starts 0 m from End 1.

Boards centred within selected area.

Inset each side: 208.8 mm

Inset each end of area: 465.6 mm

19 rows, boards run End 1 to End 2.

124 x 8ft boards + 18 x 4ft boards.

LAY FROM END 1; ROW 1 AT SIDE A

Odd rows (1, 3, 5 ... 19): FULL start

7 full 8ft per row.

Even rows (2, 4, 6 ... 18): HALF start

Half 4ft first, then 6 full 8ft.


Finish with another half 4ft.

Alternate these rows across to Side B.

FULL: 2438.4 x 609.6 mm (8ft x 2ft)

HALF: 1219.2 x 609.6 mm (4ft x 2ft)

START DETAIL - enlarged, not to scale

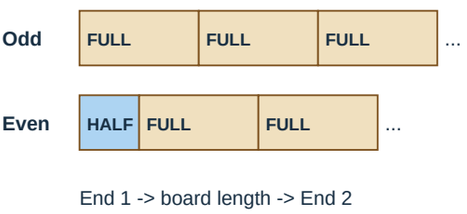

KEY: tan = full 8ft board; blue = half 4ft board; black outline = marquee.

Read the stated gaps: small clearances are too narrow to judge from the drawing.

Confirm site measurements and manufacturer fitting tolerances before laying.

Designed using hirental

Built by marquee hirers, for marquee hirers.

www.hirental.co.uk